
TKB1900S/E

Payload: 4kg Arm Reach: 1898mm

Model	TKB1900E T		TKB'	1900SE	
Payload	4kg				
Max Working Radius	1898mm				
DOF	6 Axis				
_Body Weight	190kg				
Reducer Brand	Laifu Hamonic reducer QinChuan RV reducer fo		SHIMPO Hamor Nabtesco RV re	nic reducer for J4-veducer for J1-J3	
Motor Brand	INOVANCE Brand, TÅMAGAWA Encoder				
Drive Brand	NOVANCE Brand				
Rated Power	4.68kw				
Max Speed	Jl	149	°/s		
	J2	149	°/s		
	J3	149	°/s		
	J4	148	°/S		
	J5	180	°/S		
Max Operation Area	J6	270	°/s		
	Jl	±170	0		
	J2	153%	~-92°	0	
	J3	80%	-100°		
	J4	±150	0		
	J5	±120	0		
	J6	±360)°		
Protective Specification		43			
Repeat positioning accuracy		±0.0±	Bmm		
Controller	TRC3C-B06				
Working Temperature		0~	·45°		



Motion Range

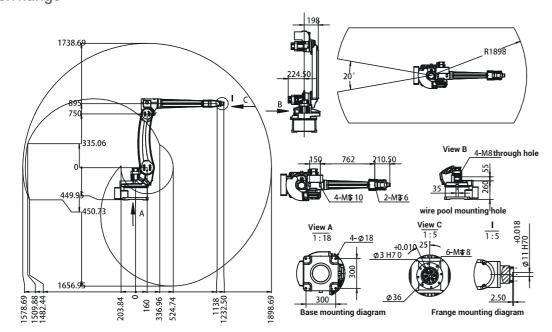

TKB2670S/E

Payload: 20kg Arm Reach: 1721mm

Model	TKB	2670S/E		
Payload		20kg		
Max Working Radius	172	1721mm		
DOF	6	6 Axis		
Body Weight	2	210kg		
Reducer Brand	Laifu Hamonic re	SHIMPO Hamonic reducer for J5–J6 Laifu Hamonic reducer for J4 QinChuan RV reducer for J1–J3		
Motor Brand	INOVANCE Brand	INOVANCE Brand, TAMAGAWA Encoder		
Drive Brand	NOVANO	NOVANCE Brand		
Rated Power	6.	6.4kw		
	JI	140°/s 111°/s		
	J2	148°/s		
Max Speed	J3 J4	234°/s		
		234 / S 225 ° / s		
	J5	360°/s		
	J6	±160°		
	Jl	150°~90°		
	J2	80°~~100°		
Max Operation Area	J3			
	J4	±160°		
	J5	±110°		
	J6	±360°		
Protective Specification		43		
Repeat Positioning Accuracy		±0.05mm		
Controller		TRC3C-A06		
Working Temperature	0	~45°		



R1721

+0.018 Ø15 H70 ∓3 +0.012 Ø6 H7 0 ∓13

Motion Range

