


并联机器人

选型手册

Parallel robot selection Manual

D3W

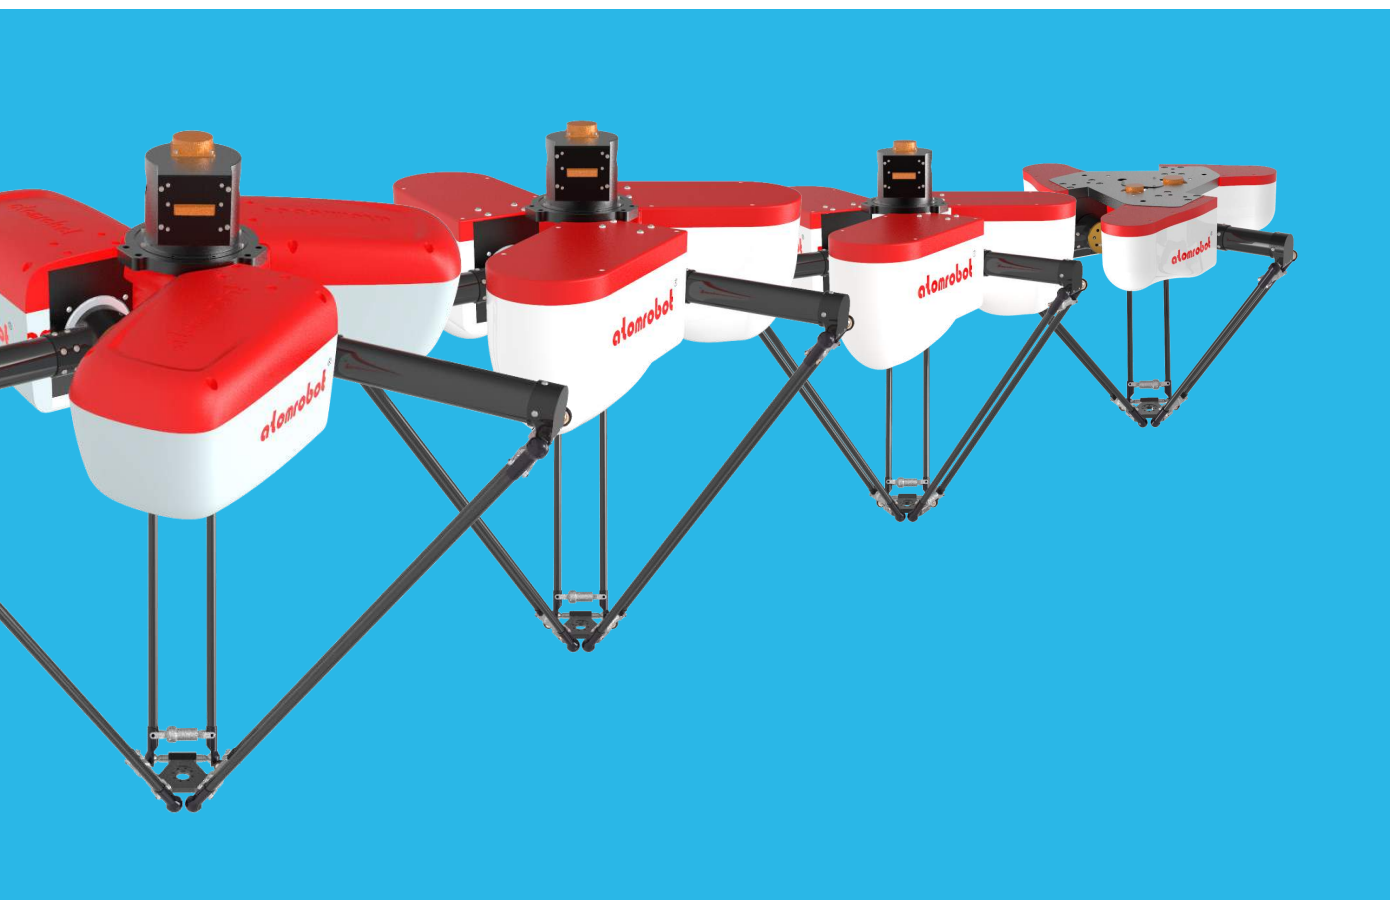

• 型号和符号

D3W	1100	P0	A2	E1	FXGX
机型	型号	负载	控制器类型	控制柜类型	视觉
D3W	600	P0: 标准	A1: ATOMCONTROL	E1: ATOM-01 E2: ATOM-02 E3: 定制	F0G0: 无视觉 FXGX: 有视觉
	800				
	1100	P15: 15KG	A2: KEBA CONTROL		
	1200				
	1300	P25: 25KG			
	1400				
	1600				

• Model and Symbol

D3W

1100

P0

A2

E1

FXGX

Robot type	Type	Load Type	Control Type	Control Cabinet	Vision Type
D3W	600	P0: Standard	A1: ATOMCONTROL	E1: ATOM-01 E2: ATOM-02 E3: Custom	F0G0: Without vision FXGX: With vision
	800				
	1100	P15: 15KG	A2: KEBA CONTROL		
	1200				
	1300	P25: 25KG			
	1400				
	1600				

D3W-600-P0



高速度
高精度
高稳定性
小巧、敏捷

High speed
High precision
High stability
Small and Agile

- ◆ 标准循环时间小于0.5s,满足追求最高速度和最小体积需求

The standard cycle time is less than 0.5s, meeting your pursuit for the maximum speed and the minimum volume.

- ◆ 特殊从动臂压缩弹簧设计, 保证从动臂使用寿命且拆装方便


Advanced design of compression spring ,enables the parallel-arm to be used for a long time and be easily dis-mounted.

- ◆ 非常适于狭小空间内作业、3C制造等行业的高速高精生产作业, 主要用于小型工件的装配、搬运、检测等

The robot is ideal for narrow space operations, as well as high-speed and high-precision in 3C field. Widely used in assembly, handling and testing of small work pieces.

型号 Type		D3W-600-P0
轴数 Axes		3
最大负载 Payload		3kg
机器人本体 Manipulator	重量 Weight	38.7kg
	工作空间直径 Diameter	600mm
重复定位精度 repeatability	位置 Position	0.05mm
	旋转 Rotation	—
旋转范围 Rotation range		—
允许负载最大旋转惯量 Allowable maximum moment of inertia		—
主动臂角度范围 Angle range of actuated arm	上摆 Up	42.5°
	下摆 Down	69.8°
输入电源 Power supply		三相 Three-phase 380VAC -10%~+10%, 49~61HZ
电源容量 Power capacity		3KVA
额定功率 Rated Power		1.2kw
保存温度 Storage temperature		-10°C~70°C
工作环境 Work environment		-10°C~50°C, RH≤80%
防护等级 Protection		IP55

● 负载-频次 Load-Frequency

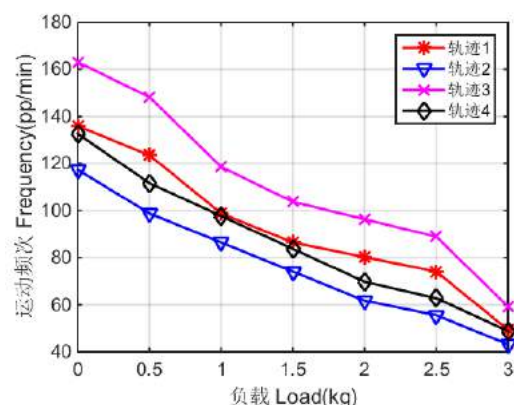


名称 Name	循环模式 Model	运动距离 Distance
轨迹1 Trajectory1	P1 → P2 → P3 → P4 → P3 → P2 → P1	h=25, b=305
轨迹2 Trajectory2	P1 → P2 → P3 → P4 → P3 → P2 → P1	h=25, b=500
轨迹3 Trajectory3	P1 → P2 → P3 → P2 → P1	h=25, b=305
轨迹4 Trajectory4	P1 → P2 → P3 → P2 → P1	h=25, b=500

特别注意: 图中节拍时间在实际条件下测得, 但根据实际运用情况的不同 (工具数据、路径半径、夹具启动等), 节拍时间也会发生变化。

外形尺寸及运动范围

Outline dimensions and Working range (mm)

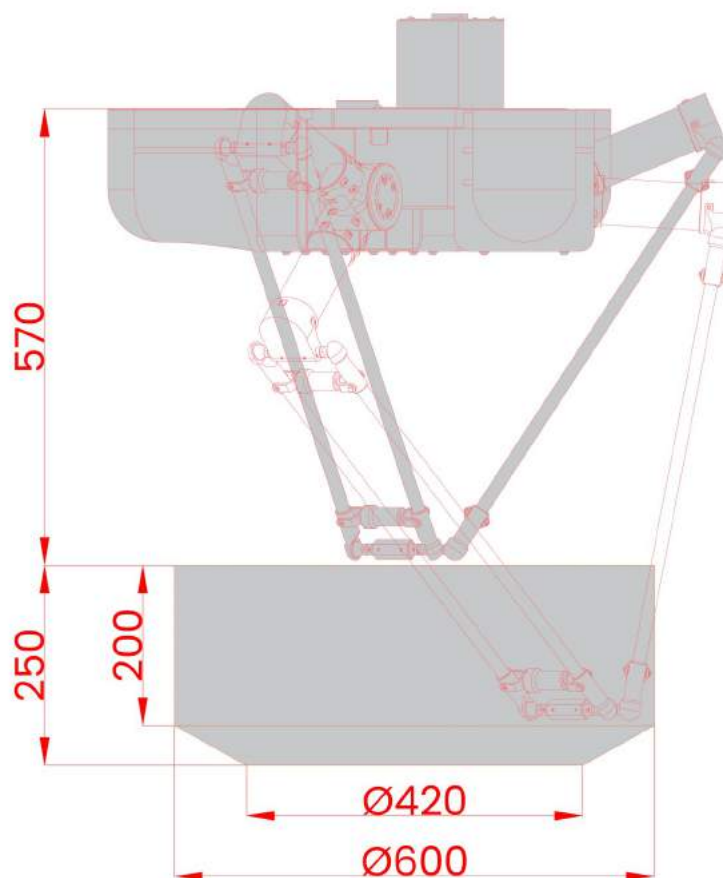


说明:

图示下部加深部分为机器人动平台几何中心的运动范围，上部为圆柱空间，并在下部向内收敛。


Instruction:

The bottom gray part is the workplace of the center point of moving platform, which is composed of a cylinder at the top and a circular truncated cone at the bottom.

法兰 Flange (mm)

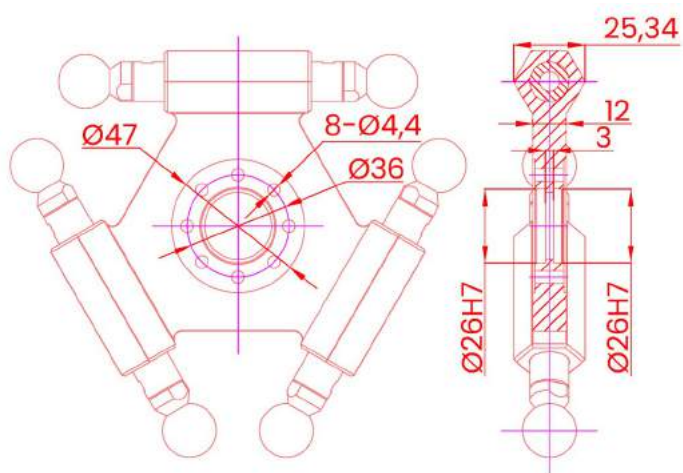

基座安装 Base installation (mm)

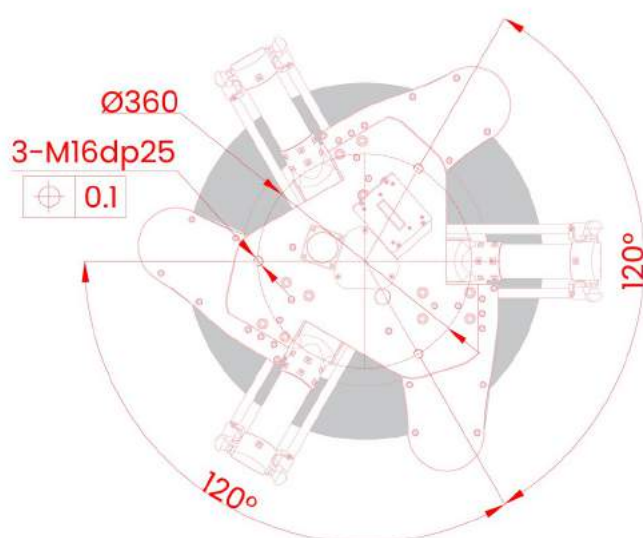

D3W-800-P0



高速度
高精度
高稳定性
经济实用

High speed
High precision
High stability
Economic & Practical

- ◆ 标准循环时间小于0.45s,满足追求最高速度和最经济需求

The standard cycle time is less than 0.45s, meeting your pursuit for the maximum speed and economic.

- ◆ 特殊从动臂压缩弹簧设计, 保证从动臂使用寿命且拆装方便



Advanced design of compression spring ,enables the parallel-arm to be used for a long time and be easily dis-mounted.

- ◆ 非常适于食品、医药等行业的高速生产作业, 主要用于小型物料的装配、搬运、分拣等

The robot is ideal for high-speed production in food and medicine industry. Widely used in assembly, handling and pick-and-place of small materials.

型号 Type		D3W-800-P0
轴数 Axes		3
最大负载 Payload		3kg
机器人本体 Manipulator	重量 Weight	69.5kg
	工作空间直径 Diameter	800mm
重复定位精度 repeatability	位置 Position	0.05mm
	旋转 Rotation	—
旋转范围 Rotation range		—
允许负载最大旋转惯量 Allowable maximum moment of inertia		—
主动臂角度范围 Angle range of actuated arm	上摆 Up	42.5°
	下摆 Down	65.8°
输入电源 Power supply		三相 Three-phase 380VAC -10%~+10%, 49~61HZ
电源容量 Power capacity		6KVA
额定功率 Rated Power		2.25kw
保存温度 Storage temperature		-10°C~70°C
工作环境 Work environment		-10°C~50°C, RH≤80%
防护等级 Protection		IP55


● 负载-频次 Load-Frequency

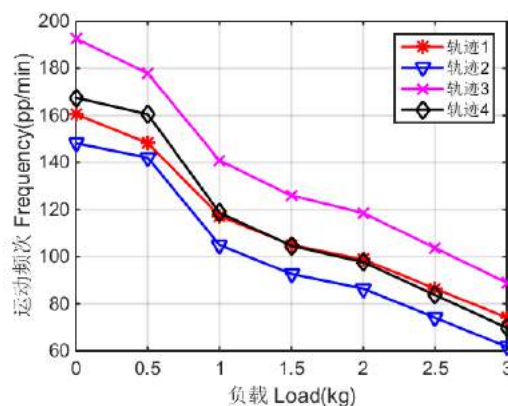

名称 Name	循环模式 Model	运动距离 Distance
轨迹1 Trajectory1	P1 → P2 → P3 → P4 → P3 → P2 → P1	h=25, b=305
轨迹2 Trajectory2	P1 → P2 → P3 → P4 → P3 → P2 → P1	h=25, b=500
轨迹3 Trajectory3	P1 → P2 → P3 → P2 → P1	h=25, b=305
轨迹4 Trajectory4	P1 → P2 → P3 → P2 → P1	h=25, b=500

特别注意: 图中节拍时间在实际条件下测得, 但根据实际运用情况的不同 (工具数据、路径半径、夹具启动等), 节拍时间也会发生变化。

外形尺寸及运动范围 Outline dimensions and Working range (mm)

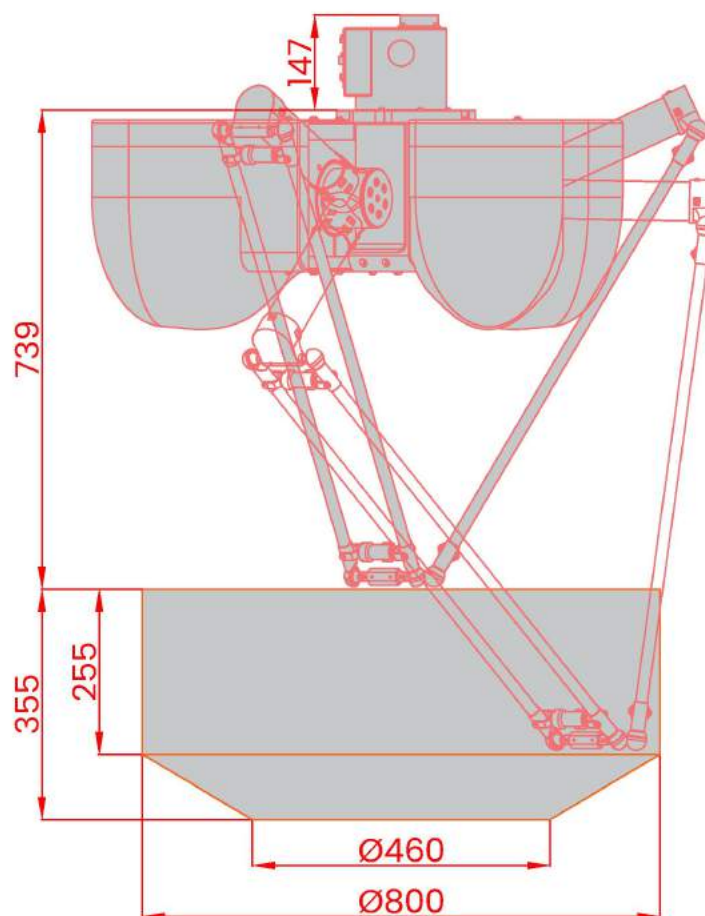


说明:

图示下部加深部分为机器人动平台几何中心的运动范围，上部为圆柱空间，并在下部向内收敛。


Instruction:

The bottom gray part is the workplace of the center point of moving platform, which is composed of a cylinder at the top and a circular truncated cone at the bottom.

法兰 Flange (mm)

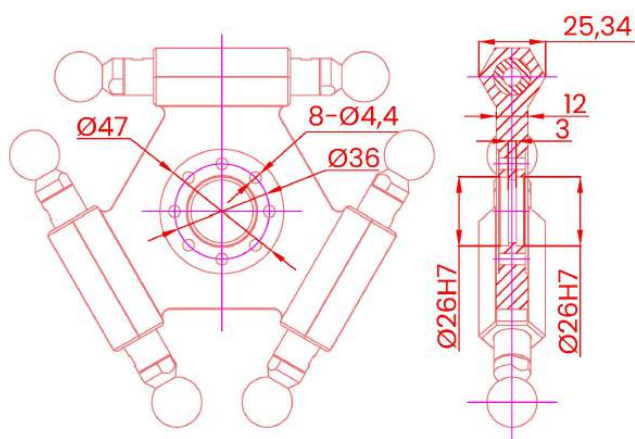

基座安装 Base installation (mm)

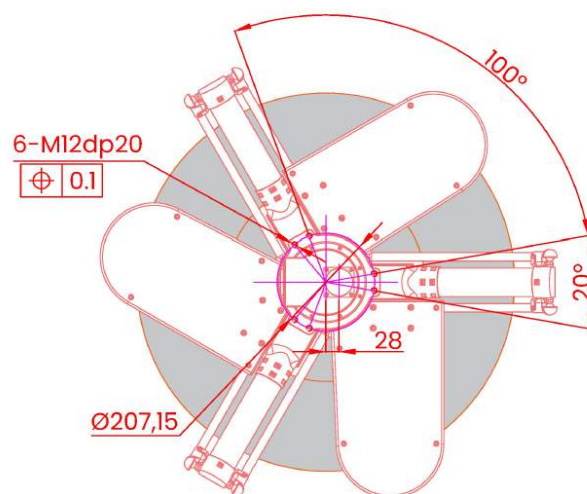

D3W-1100-P0



高速度
高稳定性
大空间
经济实用

High speed
High stability
Large space
Economic & Practical

- ◆ 标准循环时间小于0.4s,满足追求最高速度和最经济需求

The standard cycle time is less than 0.4s, meeting your pursuit for the maximum speed and economic.

- ◆ 特殊从动臂压缩弹簧设计, 保证从动臂使用寿命且拆装方便


Advanced design of compression spring ,enables the parallel-arm to be used for a long time and be easily dis-mounted.

- ◆ 非常适于食品、医药等行业的高速生产作业, 主要用于小型物料的装配、搬运、分拣等

The robot is ideal for high-speed production in food and medicine industry. Widely used in assembly, handling and pick-and-place of small materials.

型号 Type		D3W-1100-P0
轴数 Axes		3
最大负载 Payload		5kg
机器人本体 Manipulator	重量 Weight	88kg
	工作空间直径 Diameter	1100mm
重复定位精度 repeatability	位置 Position	0.05mm
	旋转 Rotation	—
旋转范围 Rotation range		—
允许负载最大旋转惯量 Allowable maximum moment of inertia		—
主动臂角度范围 Angle range of actuated arm	上摆 Up	32.5°
	下摆 Down	68.5°
输入电源 Power supply		三相 Three-phase 380VAC -10%~+10%, 49~61HZ
电源容量 Power capacity		10KVA
额定功率 Rated Power		6kw
保存温度 Storage temperature		-10°C~70°C
工作环境 Work environment		-10°C~50°C, RH≤80%
防护等级 Protection		IP55

● 负载-频次 Load-Frequency

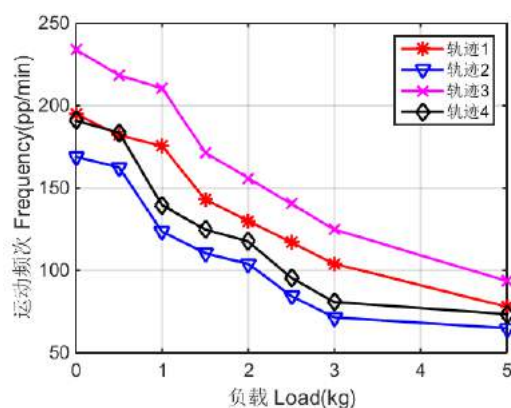


名称 Name	循环模式 Model	运动距离 Distance
轨迹1 Trajectory1	P1 → P2 → P3 → P4 → P3 → P2 → P1	h=25, b=305
轨迹2 Trajectory2	P1 → P2 → P3 → P4 → P3 → P2 → P1	h=25, b=500
轨迹3 Trajectory3	P1 → P2 → P3 → P2 → P1	h=25, b=305
轨迹4 Trajectory4	P1 → P2 → P3 → P2 → P1	h=25, b=500

特别注意: 图中节拍时间在实际条件下测得, 但根据实际运用情况的不同 (工具数据、路径半径、夹具启动等), 节拍时间也会发生变化。

外形尺寸及运动范围

Outline dimensions and Working range (mm)

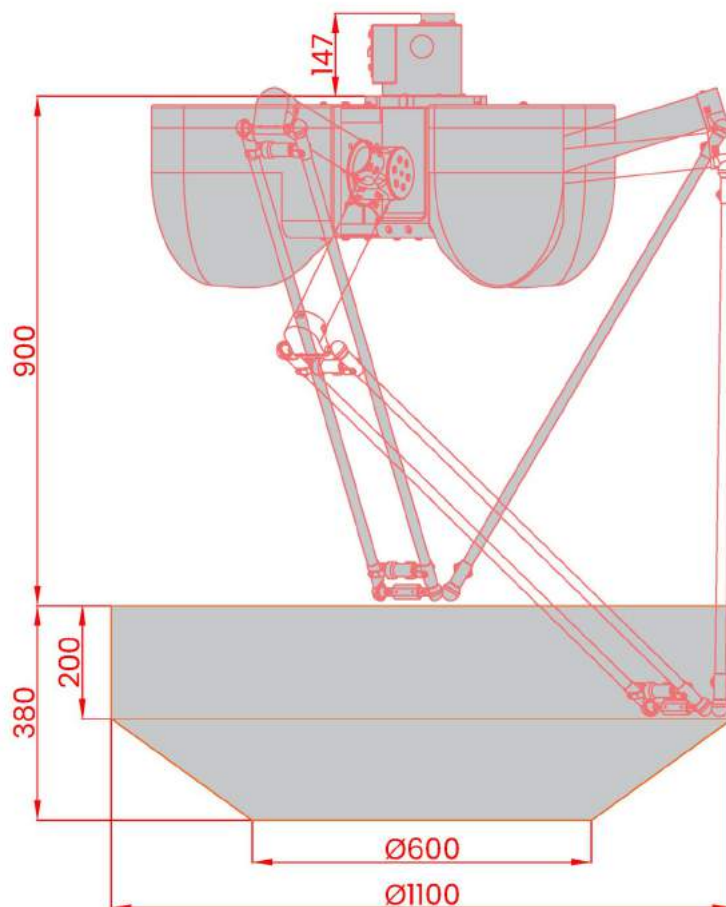


说明:

图示下部加深部分为机器人动平台几何中心的运动范围，上部为圆柱空间，并在下部向内收敛。


Instruction:

The bottom gray part is the workplace of the center point of moving platform, which is composed of a cylinder at the top and a circular truncated cone at the bottom.

法兰 Flange (mm)

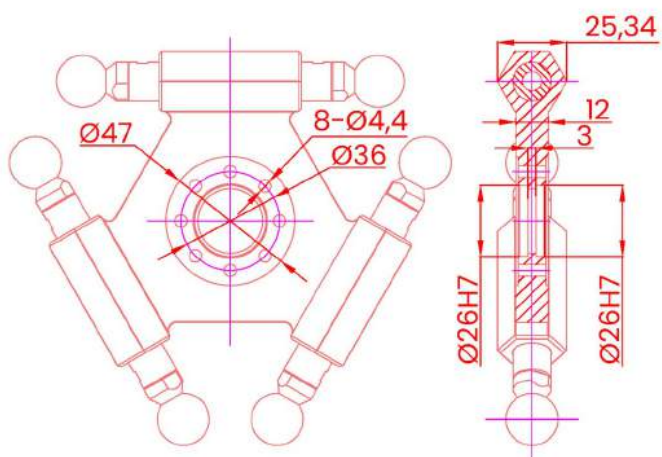

基座安装 Base installation (mm)

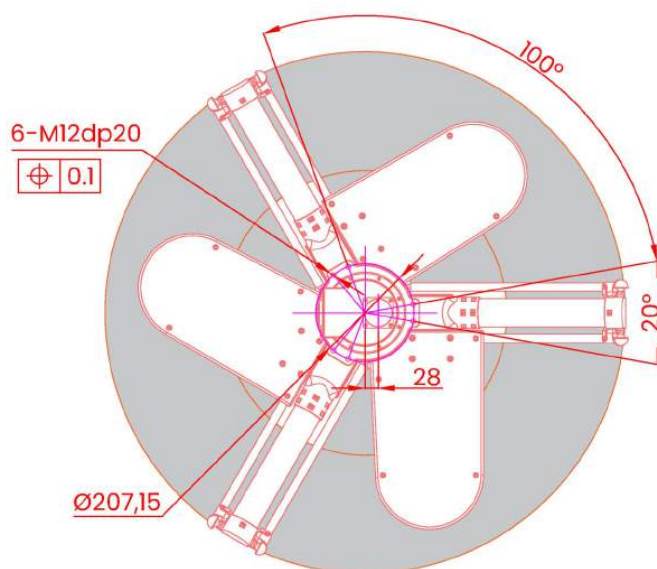

D3W-1200-P0



高速度
高稳定性
大空间
低高度

High speed
High stability
Large space
Lower Height

- ◆ 标准循环时间小于0.4s,满足追求最高速度和最经济需求

The standard cycle time is less than 0.4s, meeting your pursuit for the maximum speed and economic.

- ◆ 特殊从动臂压缩弹簧设计, 保证从动臂使用寿命且拆装方便


Advanced design of compression spring ,enables the parallel-arm to be used for a long time and be easily dis-mounted.

- ◆ 非常适于食品、医药等行业的高速生产作业, 主要用于空间高度受限场合的物料装配、搬运、分拣等

The robot is ideal for high-speed production in food and medicine industry. Widely used in assembly, handling and pick-and-place of small materials for space height limited occasions.

型号 Type		D3W-1200-P0
轴数 Axes		3
最大负载 Payload		3kg
机器人本体 Manipulator	重量 Weight	73.6kg
	工作空间直径 Diameter	1200mm
重复定位精度 repeatability	位置 Position	0.05mm
	旋转 Rotation	—
旋转范围 Rotation range		—
允许负载最大旋转惯量 Allowable maximum moment of inertia		—
主动臂角度范围 Angle range of actuated arm	上摆 Up	33°
	下摆 Down	87°
输入电源 Power supply		三相 Three-phase 380VAC -10%~+10%, 49~61HZ
电源容量 Power capacity		10KVA
额定功率 Rated Power		6kw
保存温度 Storage temperature		-10℃~70℃
工作环境 Work environment		-10℃~50℃, RH≤80%
防护等级 Protection		IP55

● 负载-频次 Load-Frequency

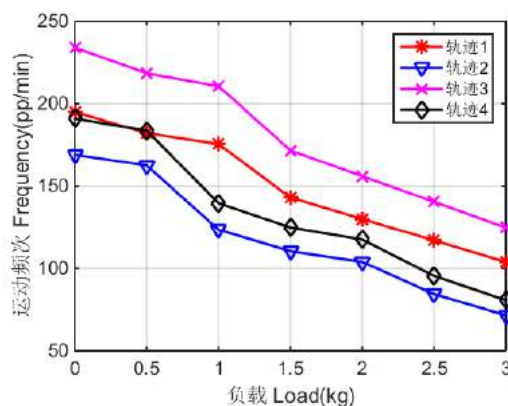


名称 Name	循环模式 Model	运动距离 Distance
轨迹1 Trajectory1	P1 → P2 → P3 → P4 → P3 → P2 → P1	h=25, b=305
轨迹2 Trajectory2	P1 → P2 → P3 → P4 → P3 → P2 → P1	h=25, b=500
轨迹3 Trajectory3	P1 → P2 → P3 → P2 → P1	h=25, b=305
轨迹4 Trajectory4	P1 → P2 → P3 → P2 → P1	h=25, b=500

特别注意: 图中节拍时间在实际条件下测得, 但根据实际运用情况的不同 (工具数据、路径半径、夹具启动等), 节拍时间也会发生变化。

外形尺寸及运动范围

Outline dimensions and Working range (mm)

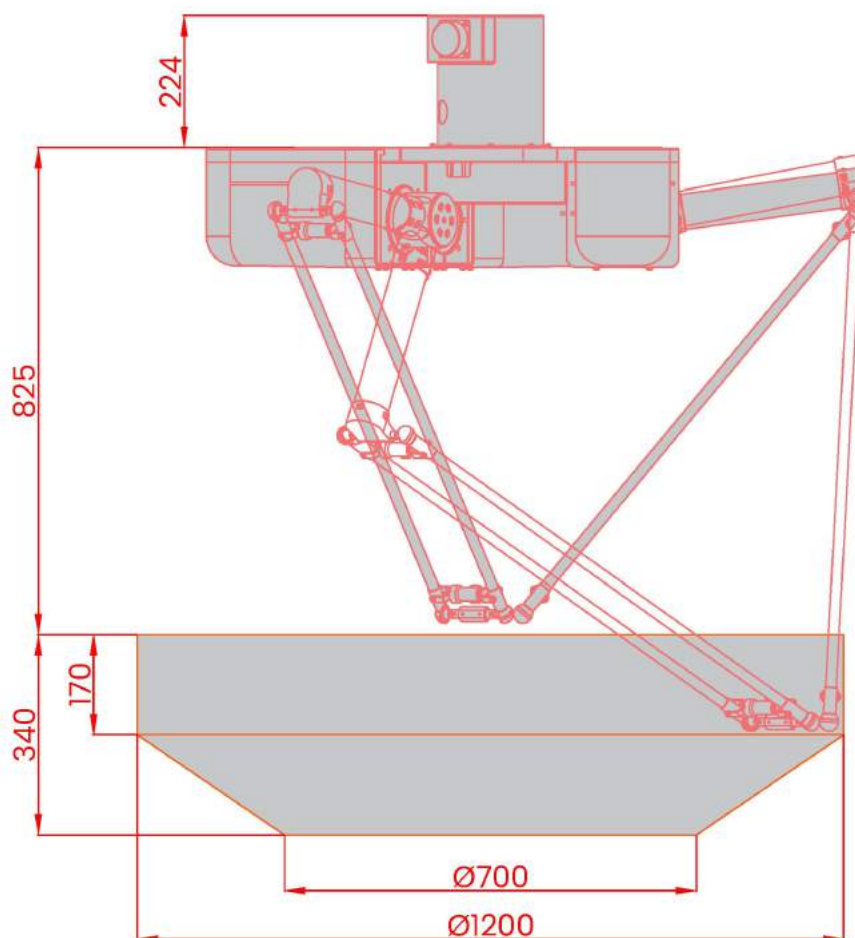


说明：

图示下部加深部分为机器人动平台几何中心的运动范围,上部为圆柱空间,并在下部向内收敛。


Instruction:

The bottom gray part is the workplace of the center point of moving platform, which is composed of a cylinder at the top and a circular truncated cone at the bottom.

法兰 Flange (mm)

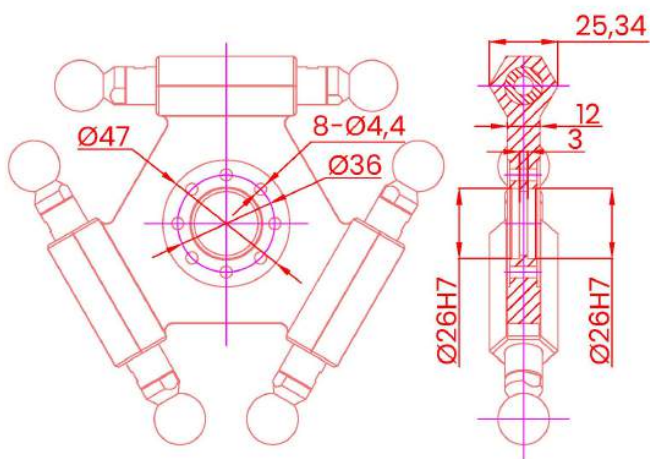

基座安装 Base installation (mm)

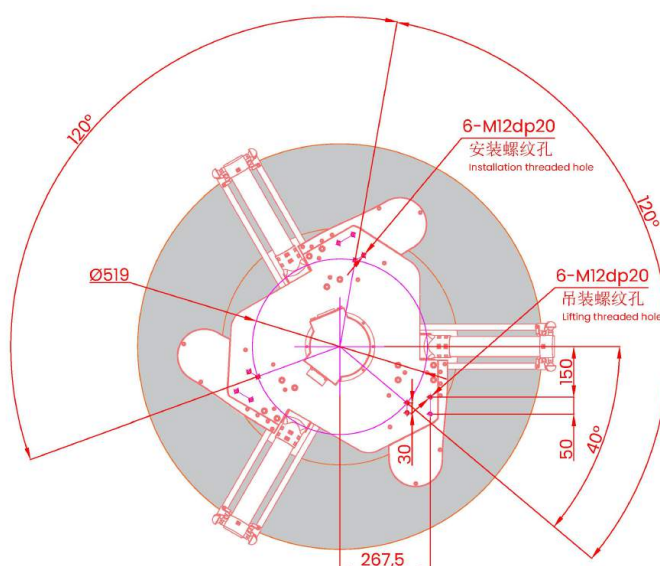

D3W-1300-P0



高速度
高稳定性
大空间
经济实用

High speed
High stability
Large space
Economic & Practical

- ◆ 标准循环时间小于0.4s,满足追求最高速度和最经济需求

The standard cycle time is less than 0.4s, meeting your pursuit for the maximum speed and economic.

- ◆ 特殊从动臂压缩弹簧设计, 保证从动臂使用寿命且拆装方便


Advanced design of compression spring ,enables the parallel-arm to be used for a long time and be easily dis-mounted.

- ◆ 非常适于食品、医药等行业的高速生产作业, 主要用于小型物料的装配、搬运、分拣等

The robot is ideal for high-speed production in food and medicine industry. Widely used in assembly, handling and pick-and-place of small materials.

型号 Type		D3W-1300-P0
轴数 Axes		3
最大负载 Payload		5kg
机器人本体 Manipulator	重量 Weight	90kg
	工作空间直径 Diameter	1300mm
重复定位精度 repeatability	位置 Position	0.05mm
	旋转 Rotation	—
旋转范围 Rotation range		—
允许负载最大旋转惯量 Allowable maximum moment of inertia		—
主动臂角度范围 Angle range of actuated arm	上摆 Up	31.5°
	下摆 Down	74°
输入电源 Power supply		三相 Three-phase 380VAC -10%~+10%, 49~61HZ
电源容量 Power capacity		10KVA
额定功率 Rated Power		6kw
保存温度 Storage temperature		-10°C~70°C
工作环境 Work environment		-10°C~50°C, RH≤80%
防护等级 Protection		IP55


● 负载-频次 Load-Frequency

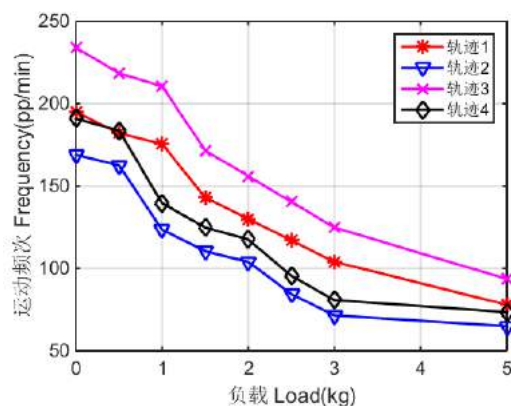

名称 Name	循环模式 Model	运动距离 Distance
轨迹1 Trajectory1	P1 → P2 → P3 → P4 → P3 → P2 → P1	h=25, b=305
轨迹2 Trajectory2	P1 → P2 → P3 → P4 → P3 → P2 → P1	h=25, b=500
轨迹3 Trajectory3	P1 → P2 → P3 → P2 → P1	h=25, b=305
轨迹4 Trajectory4	P1 → P2 → P3 → P2 → P1	h=25, b=500

特别注意: 图中节拍时间在实际条件下测得, 但根据实际运用情况的不同 (工具数据、路径半径、夹具启动等), 节拍时间也会发生变化。

外形尺寸及运动范围
Outline dimensions and Working range (mm)

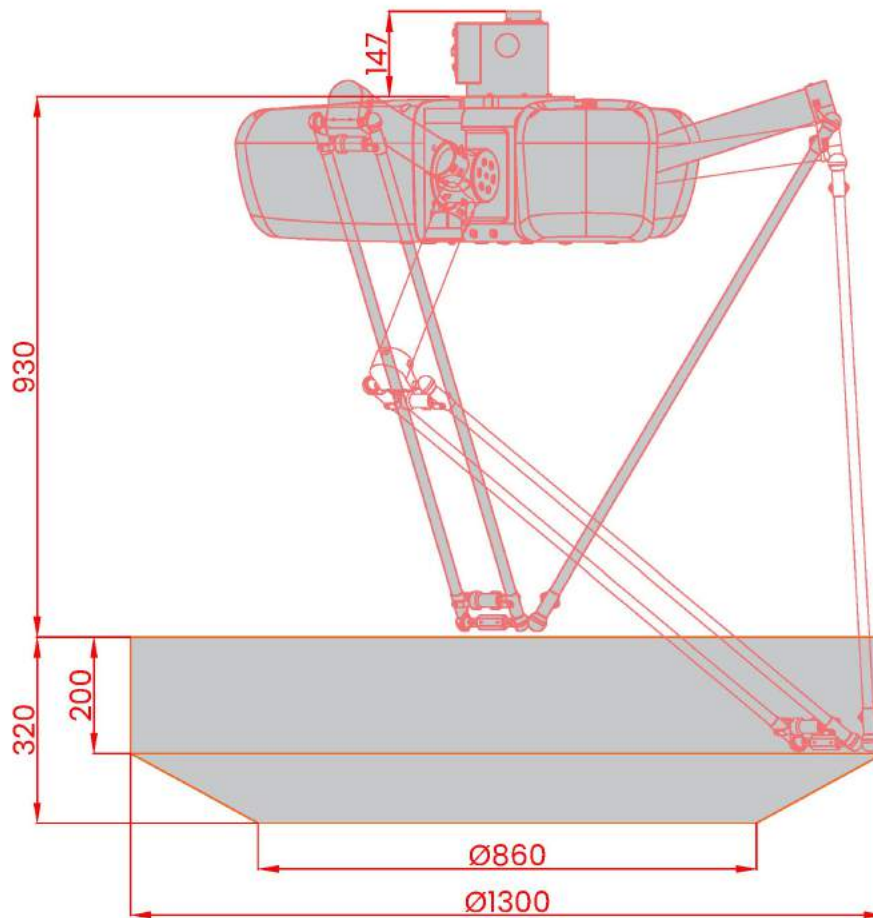


说明:

图示下部加深部分为机器人动平台几何中心的运动范围, 上部为圆柱空间, 并在下部向内收敛。


Instruction:

The bottom gray part is the work-place of the center point of moving platform, which is composed of a cylinder at the top and a circular truncated cone at the bottom.

法兰 Flange (mm)

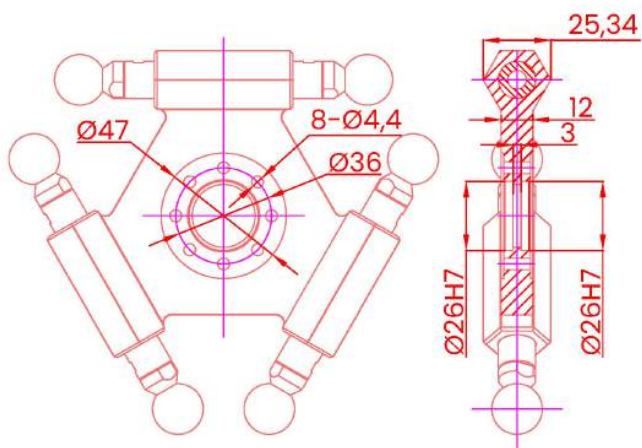

基座安装 Base installation (mm)

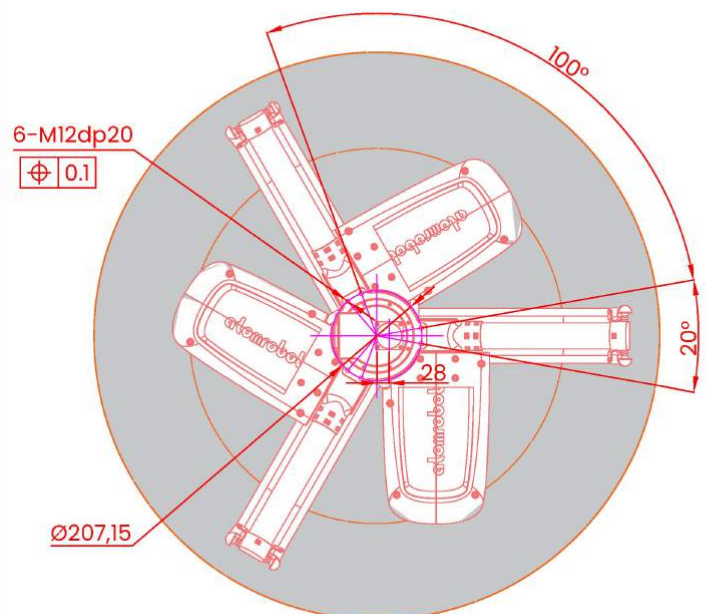

D3W-1400-P0



高速度
高稳定性
大空间
经济实用

High speed
High stability
Large space
Economic & Practical

- ◆ 标准循环时间小于0.4s,满足追求最高速度和最经济需求

The standard cycle time is less than 0.4s, meeting your pursuit for the maximum speed and economic.

- ◆ 特殊从动臂压缩弹簧设计, 保证从动臂使用寿命且拆装方便


Advanced design of compression spring ,enables the parallel-arm to be used for a long time and be easily dis-mounted.

- ◆ 非常适于食品、医药等行业的高速生产作业, 主要用于小型物料的装配、搬运、分拣等

The robot is ideal for high-speed production in food and medicine industry. Widely used in assembly, handling and pick-and-place of small materials.

型号 Type		D3W-1400-P0
轴数 Axes		3
最大负载 Payload		3kg
机器人本体 Manipulator	重量 Weight	91.5kg
	工作空间直径 Diameter	1400mm
重复定位精度 repeatability	位置 Position	0.05mm
	旋转 Rotation	—
旋转范围 Rotation range		—
允许负载最大旋转惯量 Allowable maximum moment of inertia		—
主动臂角度范围 Angle range of actuated arm	上摆 Up	22°
	下摆 Down	76°
输入电源 Power supply		三相 Three-phase 380VAC -10%~+10%, 49~61HZ
电源容量 Power capacity		10KVA
额定功率 Rated Power		6kw
保存温度 Storage temperature		-10°C~70°C
工作环境 Work environment		-10°C~50°C, RH≤80%
防护等级 Protection		IP55


● 负载-频次 Load-Frequency

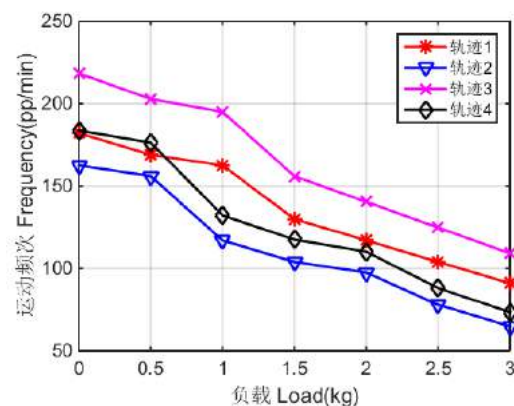

名称 Name	循环模式 Model	运动距离 Distance
轨迹1 Trajectory1	P1 → P2 → P3 → P4 → P3 → P2 → P1	h=25, b=305
轨迹2 Trajectory2	P1 → P2 → P3 → P4 → P3 → P2 → P1	h=25, b=500
轨迹3 Trajectory3	P1 → P2 → P3 → P2 → P1	h=25, b=305
轨迹4 Trajectory4	P1 → P2 → P3 → P2 → P1	h=25, b=500

特别注意: 图中节拍时间在实际条件下测得, 但根据实际运用情况的不同 (工具数据、路径半径、夹具启动等), 节拍时间也会发生变化。


外形尺寸及运动范围 Outline dimensions and Working range (mm)

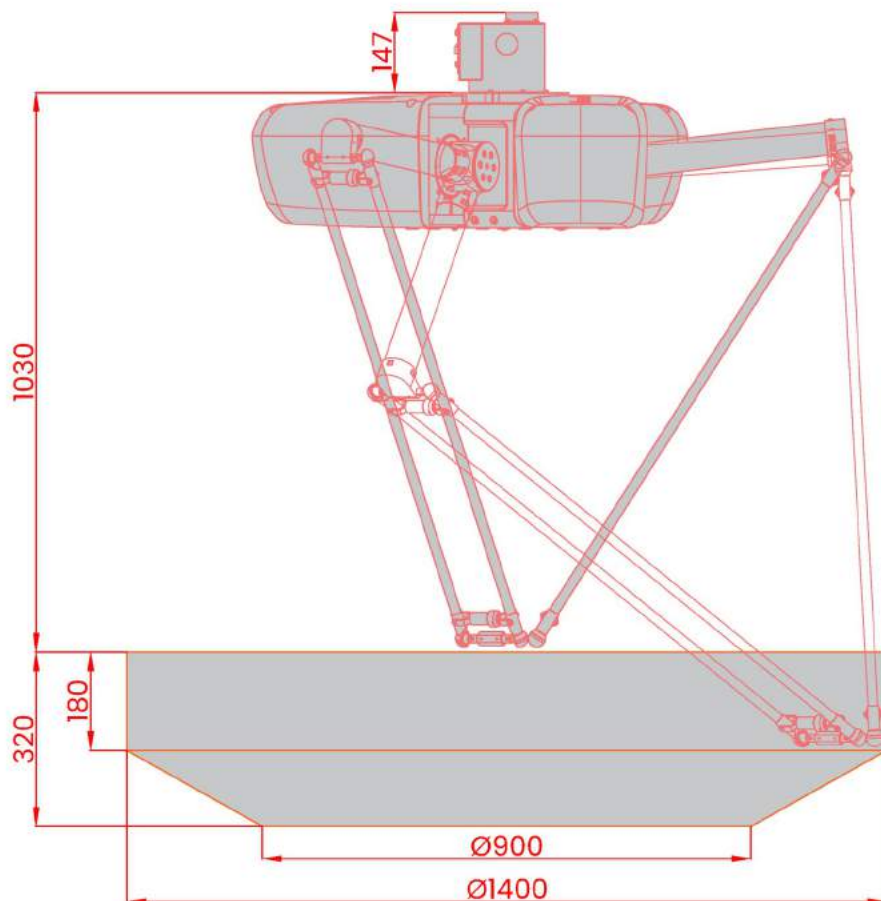


说明:
图示下部加深部分为机器人动平台几何中心的运动范围，上部为圆柱空间，并在下部向内收敛。

Instruction:
The bottom gray part is the work-place of the center point of moving platform, which is composed of a cylinder at the top and a circular truncated cone at the bottom.

法兰 Flange (mm)

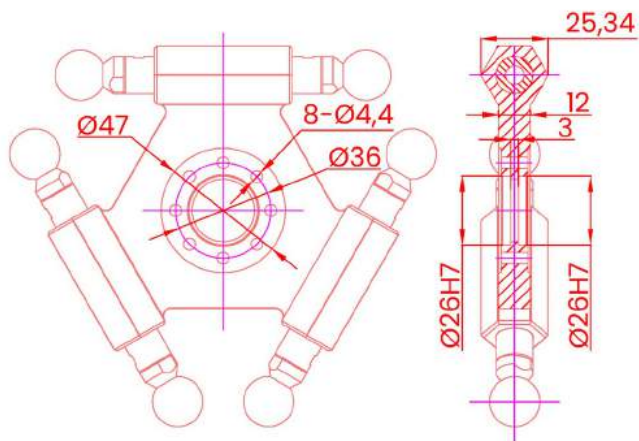

基座安装 Base installation (mm)

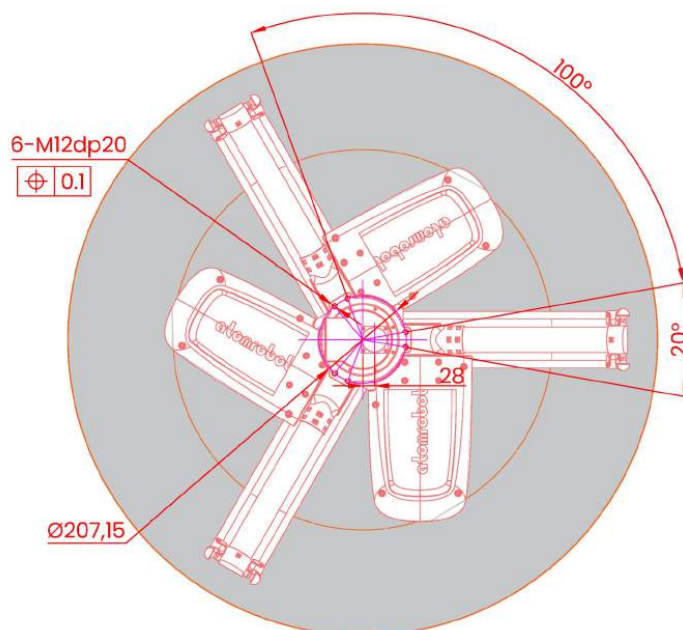

D3W-1600-P0



高速度
高稳定性
大空间
经济实用

High speed
High stability
Large space
Economic & Practical

- ◆ 标准循环时间小于0.4s,满足追求最高速度和最经济需求

The standard cycle time is less than 0.4s, meeting your pursuit for the maximum speed and economic.

- ◆ 特殊从动臂压缩弹簧设计, 保证从动臂使用寿命且拆装方便


Advanced design of compression spring ,enables the parallel-arm to be used for a long time and be easily dis-mounted.

- ◆ 非常适于食品、医药等行业的高速生产作业, 主要用于小型物料的装配、搬运、分拣等

The robot is ideal for high-speed production in food and medicine industry. Widely used in assembly, handling and pick-and-place of small materials.

型号 Type		D3W-1600-P0
轴数 Axes		3
最大负载 Payload		3kg
机器人本体 Manipulator	重量 Weight	93kg
	工作空间直径 Diameter	1600mm
重复定位精度 repeatability	位置 Position	0.05mm
	旋转 Rotation	—
旋转范围 Rotation range		—
允许负载最大旋转惯量 Allowable maximum moment of inertia		—
主动臂角度范围 Angle range of actuated arm	上摆 Up	22°
	下摆 Down	76°
输入电源 Power supply		三相 Three-phase 380VAC -10%~+10%, 49~61HZ
电源容量 Power capacity		10KVA
额定功率 Rated Power		6kw
保存温度 Storage temperature		-10°C~70°C
工作环境 Work environment		-10°C~50°C, RH≤80%
防护等级 Protection		IP55


● 负载-频次 Load-Frequency

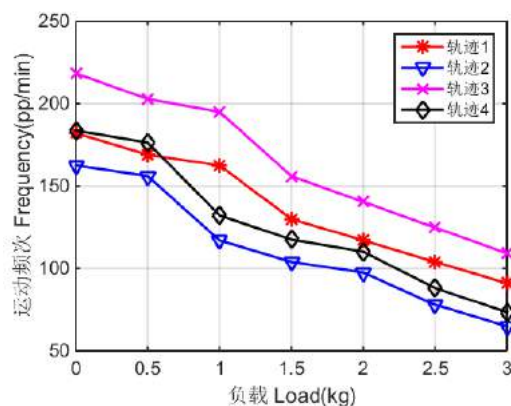

名称 Name	循环模式 Model	运动距离 Distance
轨迹1 Trajectory1	P1 → P2 → P3 → P4 → P3 → P2 → P1	h=25, b=305
轨迹2 Trajectory2	P1 → P2 → P3 → P4 → P3 → P2 → P1	h=25, b=500
轨迹3 Trajectory3	P1 → P2 → P3 → P2 → P1	h=25, b=305
轨迹4 Trajectory4	P1 → P2 → P3 → P2 → P1	h=25, b=500

特别注意: 图中节拍时间在实际条件下测得, 但根据实际运用情况的不同 (工具数据、路径半径、夹具启动等), 节拍时间也会发生变化。


外形尺寸及运动范围 Outline dimensions and Working range (mm)

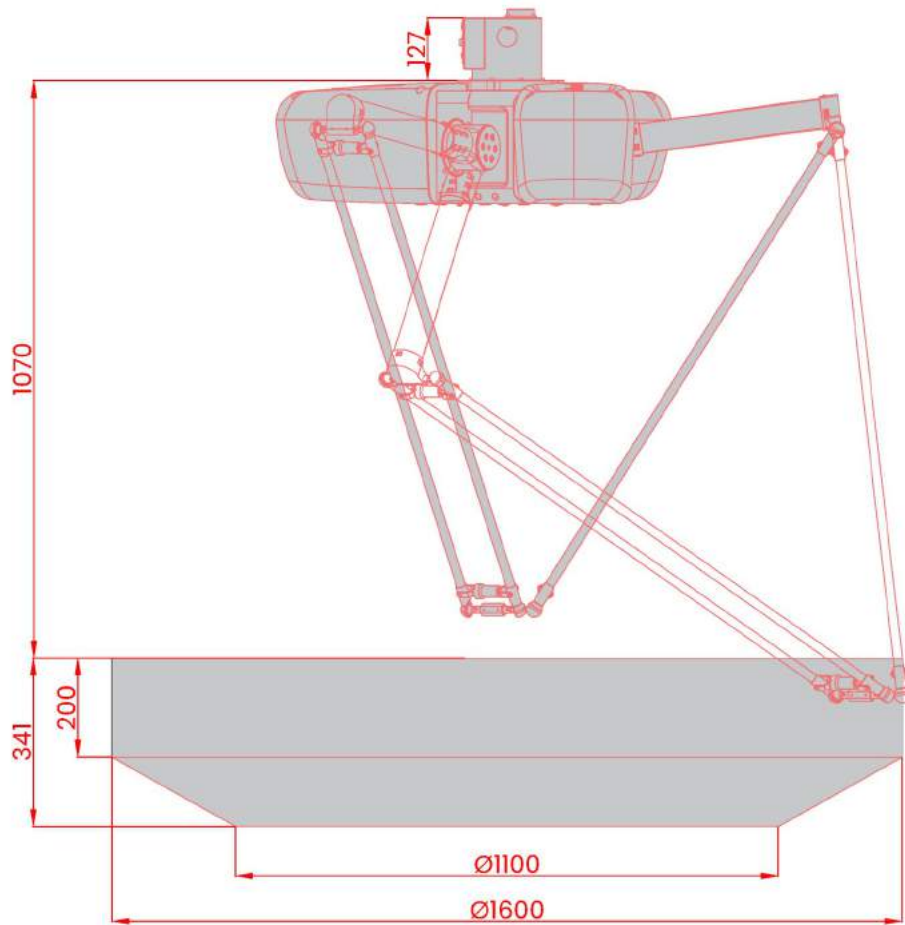


说明:
图示下部加深部分为机器人动平台几何中心的运动范围，上部为圆柱空间，并在下部向内收敛。

Instruction:
The bottom gray part is the work-place of the center point of moving platform, which is composed of a cylinder at the top and a circular truncated cone at the bottom.

法兰 Flange (mm)

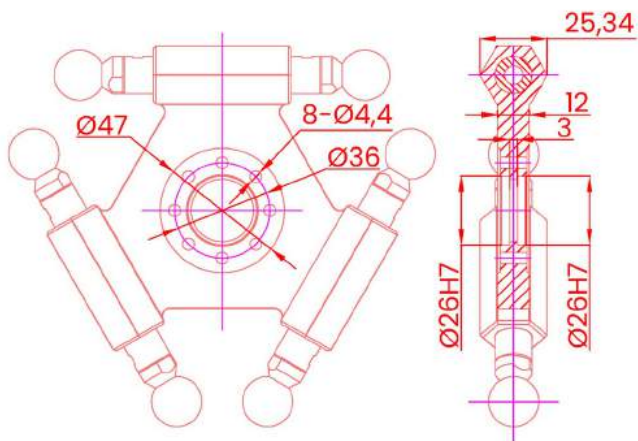

基座安装 Base installation (mm)

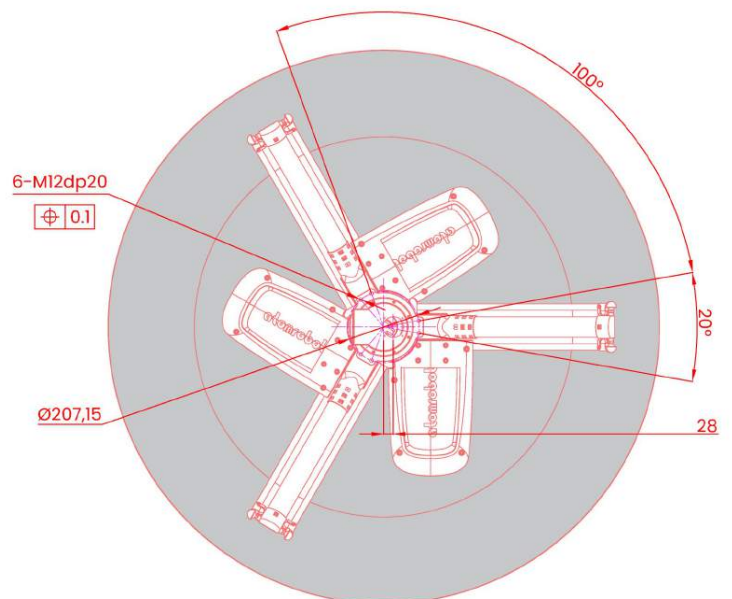

D3W-1100-P15



高稳定性
大空间
重负载
经济实用

High stability
Large space
Heavy load
Economic & Practical

- ◆ 标准循环时间小于0.6s,满足追求最高负载和最经济需求

The standard cycle time is less than 0.6s, meeting your pursuit for the maximum load and economic.

- ◆ 特殊从动臂压缩弹簧设计, 保证从动臂使用寿命且拆装方便


Advanced design of compression spring ,enables the parallel-arm to be used for a long time and be easily dis-mounted.

- ◆ 非常适于食品、医药等行业的高速生产作业, 主要用于较重型物料的装配、搬运、分拣等

The robot is ideal for high-speed production in food and medicine industry. Widely used in assembly, handling and pick-and-place of heavy materials.

型号 Type		D3W-1100-P15
轴数 Axes		3
最大负载 Payload		15kg
机器人本体 Manipulator	重量 Weight	115kg
	工作空间直径 Diameter	1100mm
重复定位精度 repeatability	位置 Position	0.05mm
	旋转 Rotation	—
旋转范围 Rotation range		—
允许负载最大旋转惯量 Allowable maximum moment of inertia		—
主动臂角度范围 Angle range of actuated arm	上摆 Up	23.5°
	下摆 Down	70°
输入电源 Power supply		三相 Three-phase 380VAC -10%~+10%, 49~61HZ
电源容量 Power capacity		10KVA
额定功率 Rated Power		6kw
保存温度 Storage temperature		-10°C~70°C
工作环境 Work environment		-10°C~50°C, RH≤80%
防护等级 Protection		IP55


● 负载-频次 Load-Frequency

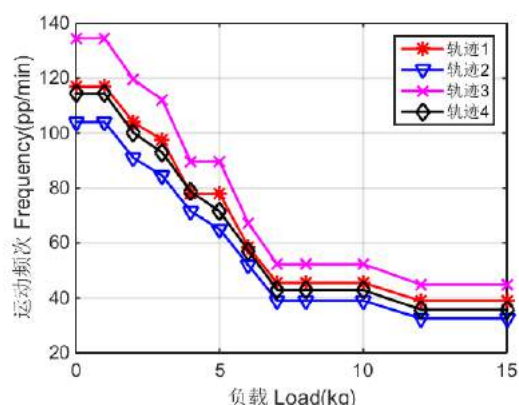

名称 Name	循环模式 Model	运动距离 Distance
轨迹1 Trajectory1	P1 → P2 → P3 → P4 → P3 → P2 → P1	h=25, b=305
轨迹2 Trajectory2	P1 → P2 → P3 → P4 → P3 → P2 → P1	h=25, b=500
轨迹3 Trajectory3	P1 → P2 → P3 → P2 → P1	h=25, b=305
轨迹4 Trajectory4	P1 → P2 → P3 → P2 → P1	h=25, b=500

特别注意: 图中节拍时间在实际条件下测得, 但根据实际运用情况的不同 (工具数据、路径半径、夹具启动等), 节拍时间也会发生变化。

外形尺寸及运动范围 Outline dimensions and Working range (mm)

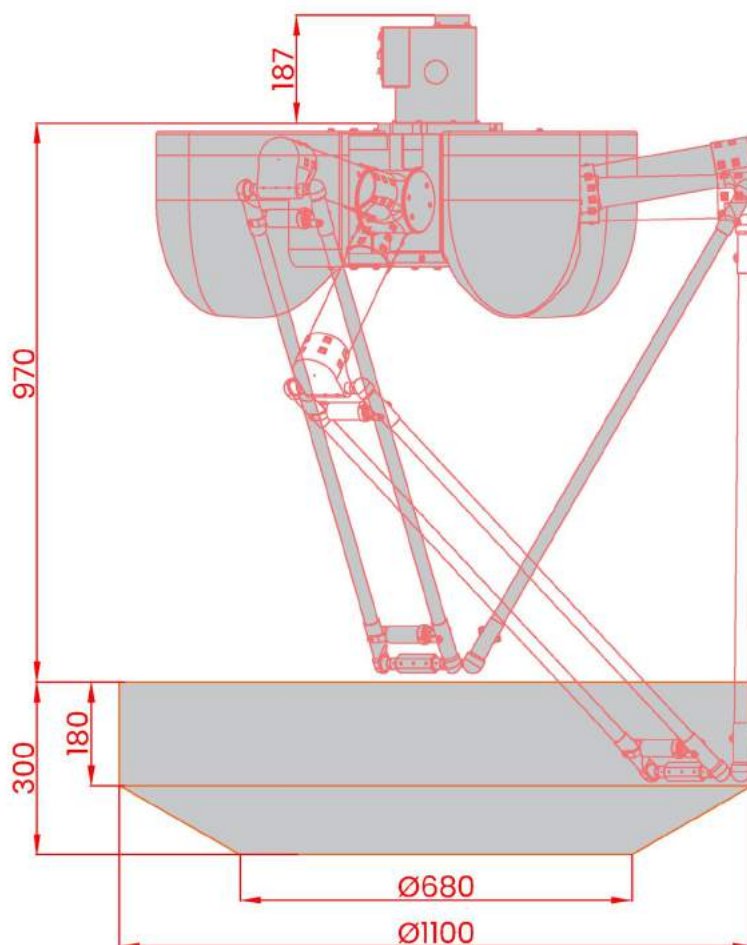


说明:

图示下部加深部分为机器人动平台几何中心的运动范围, 上部为圆柱空间, 并在下部向内收敛。



Instruction:

The bottom gray part is the workplace of the center point of moving platform, which is composed of a cylinder at the top and a circular truncated cone at the bottom.

法兰 Flange (mm)

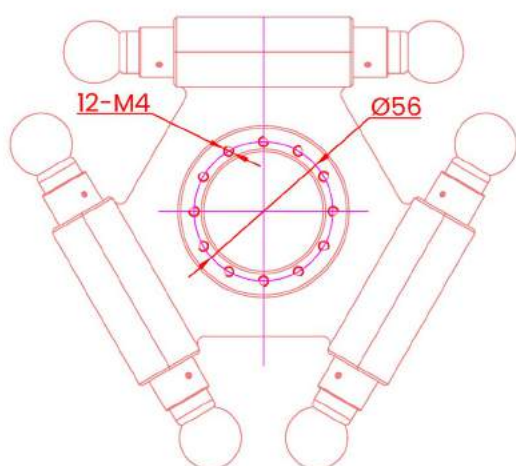

基座安装 Base installation (mm)

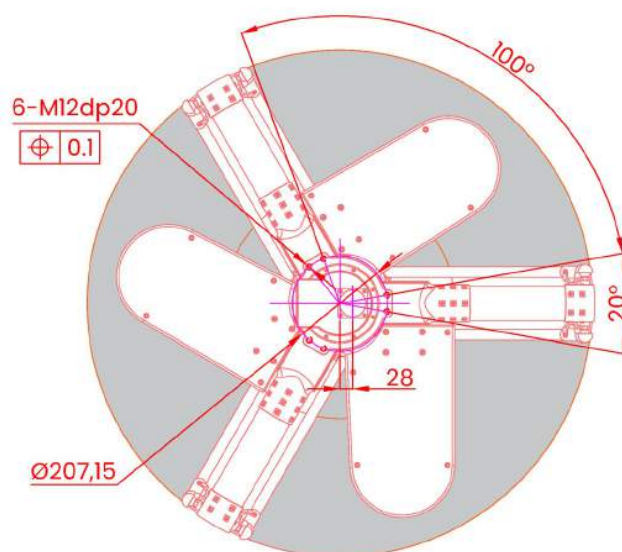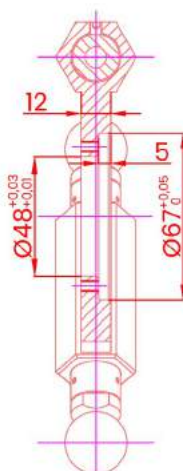

D3W-1400-P15



高稳定性
大空间
重负载
经济实用

High stability
Large space
Heavy load
Economic & Practical

- ◆ 标准循环时间小于0.6s,满足追求最高负载和最经济需求

The standard cycle time is less than 0.6s, meeting your pursuit for the maximum load and economic.

- ◆ 特殊从动臂压缩弹簧设计, 保证从动臂使用寿命且拆装方便


Advanced design of compression spring ,enables the parallel-arm to be used for a long time and be easily dis-mounted.

- ◆ 非常适于食品、医药等行业的高速生产作业, 主要用于较重型物料的装配、搬运、分拣等

The robot is ideal for high-speed production in food and medicine industry. Widely used in assembly, handling and pick-and-place of heavy materials.

型号 Type		D3W-1400-P15
轴数 Axes		3
最大负载 Payload		15kg
机器人本体 Manipulator	重量 Weight	127kg
	工作空间直径 Diameter	1400mm
重复定位精度 repeatability	位置 Position	0.05mm
	旋转 Rotation	—
旋转范围 Rotation range		—
允许负载最大旋转惯量 Allowable maximum moment of inertia		—
主动臂角度范围 Angle range of actuated arm	上摆 Up	29.9°
	下摆 Down	63.6°
输入电源 Power supply		三相 Three-phase 380VAC -10%~+10%, 49~61HZ
电源容量 Power capacity		10KVA
额定功率 Rated Power		6kw
保存温度 Storage temperature		-10°C~70°C
工作环境 Work environment		-10°C~50°C, RH≤80%
防护等级 Protection		IP55

● 负载-频次 Load-Frequency

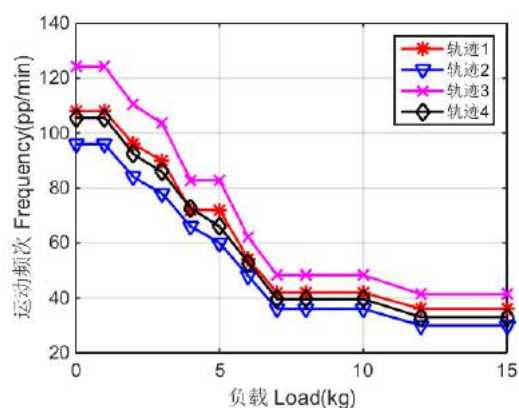


名称 Name	循环模式 Model	运动距离 Distance
轨迹1 Trajectory1	P1 → P2 → P3 → P4 → P3 → P2 → P1	h=25, b=305
轨迹2 Trajectory2	P1 → P2 → P3 → P4 → P3 → P2 → P1	h=25, b=500
轨迹3 Trajectory3	P1 → P2 → P3 → P2 → P1	h=25, b=305
轨迹4 Trajectory4	P1 → P2 → P3 → P2 → P1	h=25, b=500

特别注意: 图中节拍时间在实际条件下测得, 但根据实际运用情况的不同 (工具数据、路径半径、夹具启动等), 节拍时间也会发生变化。

外形尺寸及运动范围


Outline dimensions and Working range (mm)

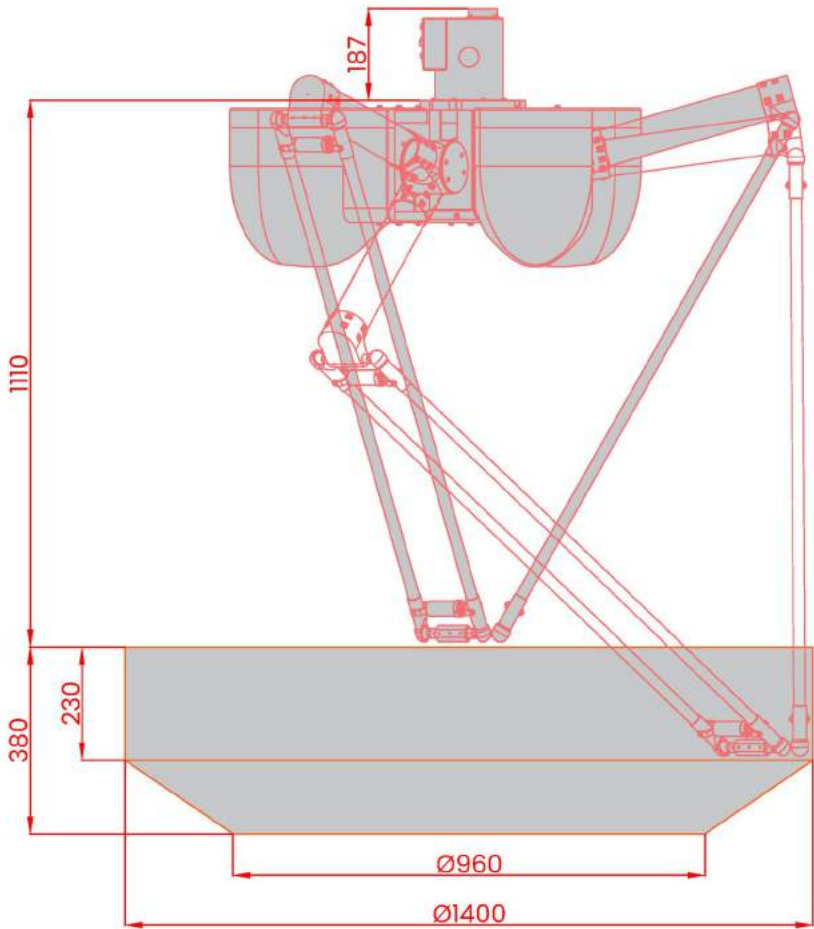


说明:
图示下部加深部分为
机器人动平台几何中
心的运动范围, 上部
为圆柱空间, 并在下
部向内收敛。

Instruction:
The bottom gray
part is the work-
place of the cen-
ter point of mov-
ing platform,
which is com-
posed of a cylin-
der at the top and
a circular truncat-
ed cone at the
bottom.

法兰 Flange (mm)

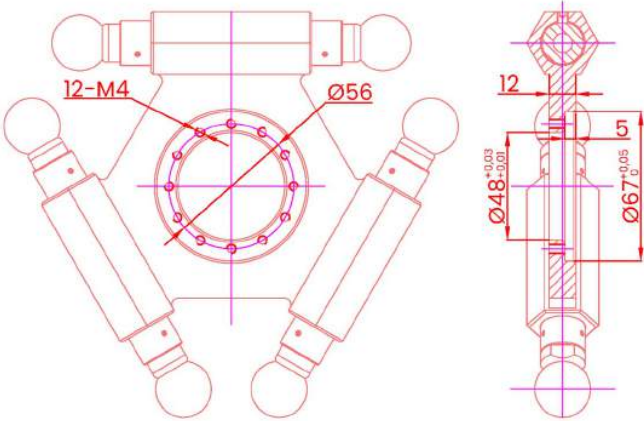

基座安装 Base installation (mm)

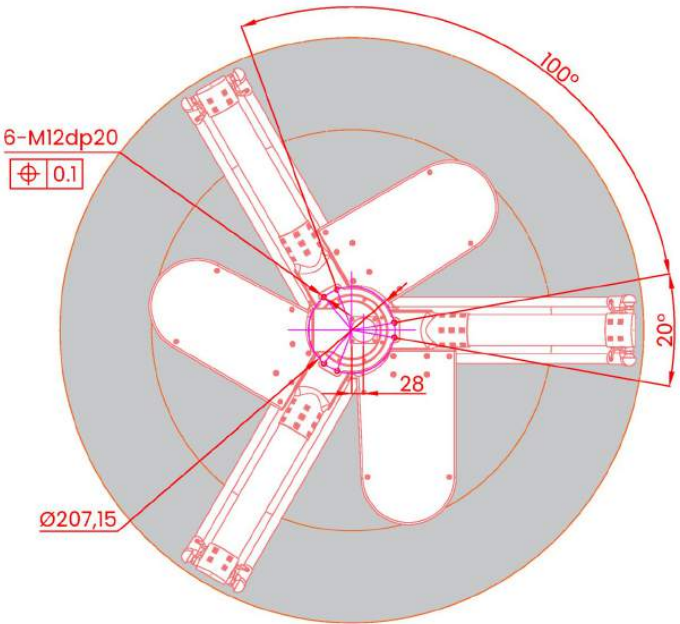

D3W-1600-P15



高稳定性
大空间
重负载
经济实用

High stability
Large space
Heavy load
Economic & Practical

◆ 标准循环时间小于0.6s,满足追求最高负载和最经济需求

The standard cycle time is less than 0.6s, meeting your pursuit for the maximum load and economic.

◆ 特殊从动臂压缩弹簧设计, 保证从动臂使用寿命且拆装方便


Advanced design of compression spring ,enables the parallel-arm to be used for a long time and be easily dis-mounted.

◆ 非常适于食品、医药等行业的高速生产作业, 主要用于较重型物料的装配、搬运、分拣等

The robot is ideal for high-speed production in food and medicine industry. Widely used in assembly, handling and pick-and-place of heavy materials.

型号 Type		D3W-1600-P15
轴数 Axes		3
最大负载 Payload		15kg
机器人本体 Manipulator	重量 Weight	133kg
	工作空间直径 Diameter	1600mm
重复定位精度 repeatability	位置 Position	0.05mm
	旋转 Rotation	—
旋转范围 Rotation range		—
允许负载最大旋转惯量 Allowable maximum moment of inertia		—
主动臂角度范围 Angle range of actuated arm	上摆 Up	23°
	下摆 Down	71.5°
输入电源 Power supply		三相 Three-phase 380VAC -10%~+10%, 49~61HZ
电源容量 Power capacity		10KVA
额定功率 Rated Power		6kw
保存温度 Storage temperature		-10°C~70°C
工作环境 Work environment		-10°C~50°C, RH≤80%
防护等级 Protection		IP55

● 负载-频次 Load-Frequency

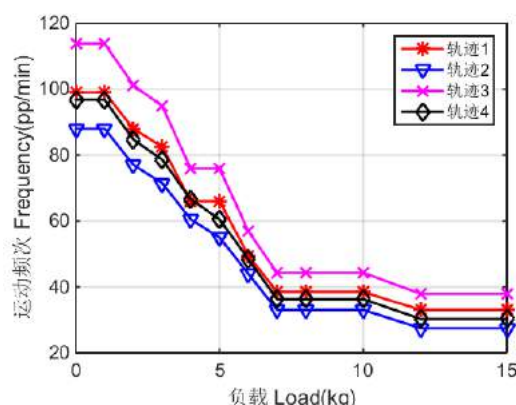


名称 Name	循环模式 Model	运动距离 Distance
轨迹1 Trajectory1	P1 → P2 → P3 → P4 → P3 → P2 → P1	h=25, b=305
轨迹2 Trajectory2	P1 → P2 → P3 → P4 → P3 → P2 → P1	h=25, b=500
轨迹3 Trajectory3	P1 → P2 → P3 → P2 → P1	h=25, b=305
轨迹4 Trajectory4	P1 → P2 → P3 → P2 → P1	h=25, b=500

特别注意: 图中节拍时间在实际条件下测得, 但根据实际运用情况的不同 (工具数据、路径半径、夹具启动等), 节拍时间也会发生变化。

外形尺寸及运动范围



Outline dimensions and Working range (mm)

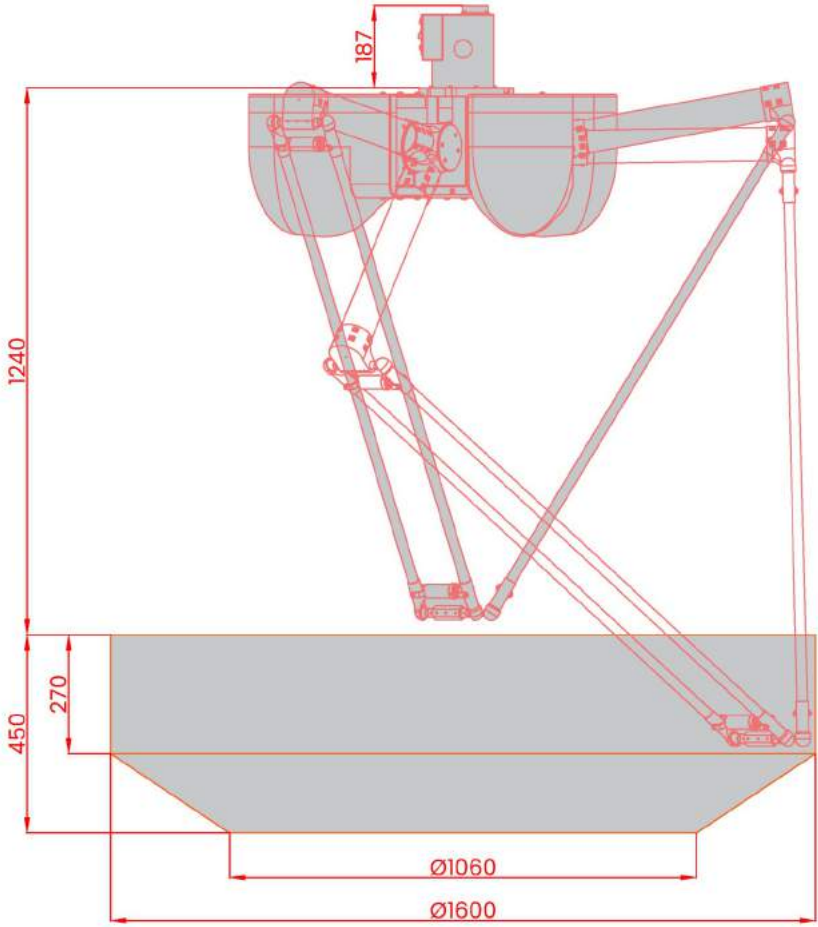


说明:
图示下部加深部分为机器人动平台几何中心的运动范围, 上部为圆柱空间, 并在下部向内收敛。

Instruction:
The bottom gray part is the workplace of the center point of moving platform, which is composed of a cylinder at the top and a circular truncated cone at the bottom.

法兰 Flange (mm)

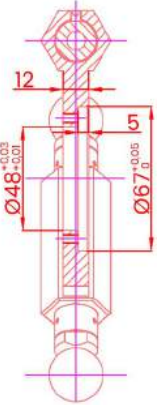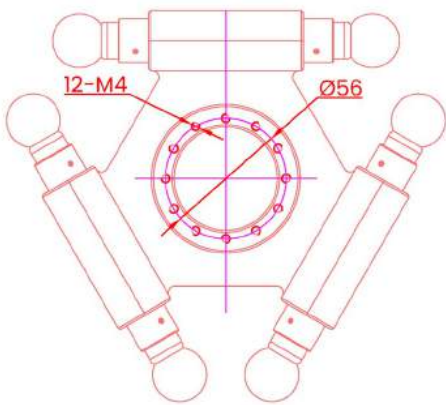

基座安装 Base installation (mm)

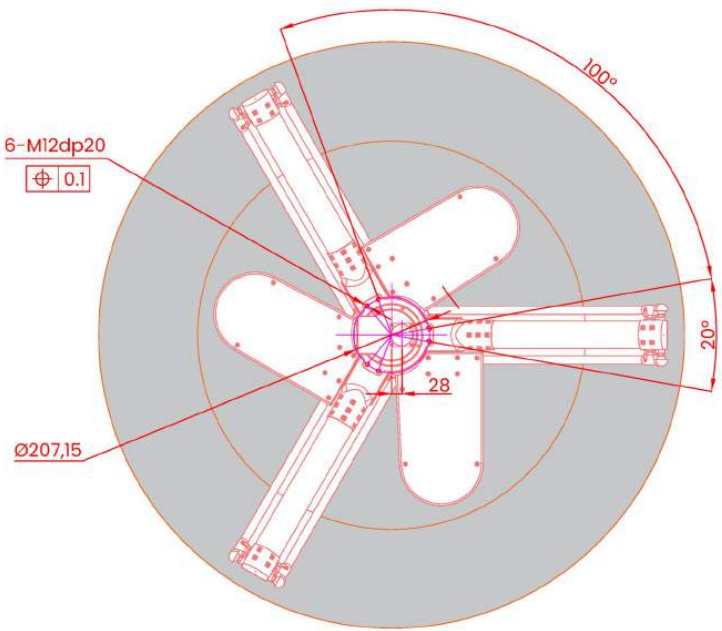

D3W-1200-P25



高稳定性
大空间
超重负载

High stability
Large space
Super-heavy load

- ◆ 标准循环时间小于0.67s,满足追求最高负载和最经济需求

The standard cycle time is less than 0.67s, meeting your pursuit for the maximum load and economic.

- ◆ 特殊从动臂压缩弹簧设计, 保证从动臂使用寿命且拆装方便


Advanced design of compression spring ,enables the parallel-arm to be used for a long time and be easily dis-mounted.

- ◆ 非常适于食品、医药等行业的高速生产作业, 主要用于较重型物料的装配、搬运、分拣等

The robot is ideal for high-speed production in food and medicine industry. Widely used in assembly, handling and pick-and-place of heavy materials.

型号 Type		D3W-1200-P25
轴数 Axes		3
最大负载 Payload		25kg
机器人本体 Manipulator	重量 Weight	143kg
	工作空间直径 Diameter	1200mm
重复定位精度 repeatability	位置 Position	0.05mm
	旋转 Rotation	—
旋转范围 Rotation range		—
允许负载最大旋转惯量 Allowable maximum moment of inertia		—
主动臂角度范围 Angle range of actuated arm	上摆 Up	33.8°
	下摆 Down	87.8°
输入电源 Power supply		三相 Three-phase 380VAC -10%~+10%, 49~61HZ
电源容量 Power capacity		15KVA
额定功率 Rated Power		9kw
保存温度 Storage temperature		-10°C~70°C
工作环境 Work environment		-10°C~50°C, RH≤80%
防护等级 Protection		IP55


● 负载-频次 Load-Frequency

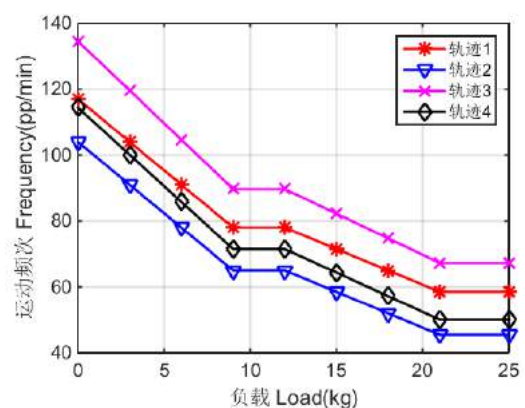

名称 Name	循环模式 Model	运动距离 Distance
轨迹1 Trajectory1	P1 → P2 → P3 → P4 → P3 → P2 → P1	h=25, b=305
轨迹2 Trajectory2	P1 → P2 → P3 → P4 → P3 → P2 → P1	h=25, b=500
轨迹3 Trajectory3	P1 → P2 → P3 → P2 → P1	h=25, b=305
轨迹4 Trajectory4	P1 → P2 → P3 → P2 → P1	h=25, b=500

特别注意: 图中节拍时间在实际条件下测得, 但根据实际运用情况的不同 (工具数据、路径半径、夹具启动等), 节拍时间也会发生变化。

外形尺寸及运动范围 Outline dimensions and Working range (mm)

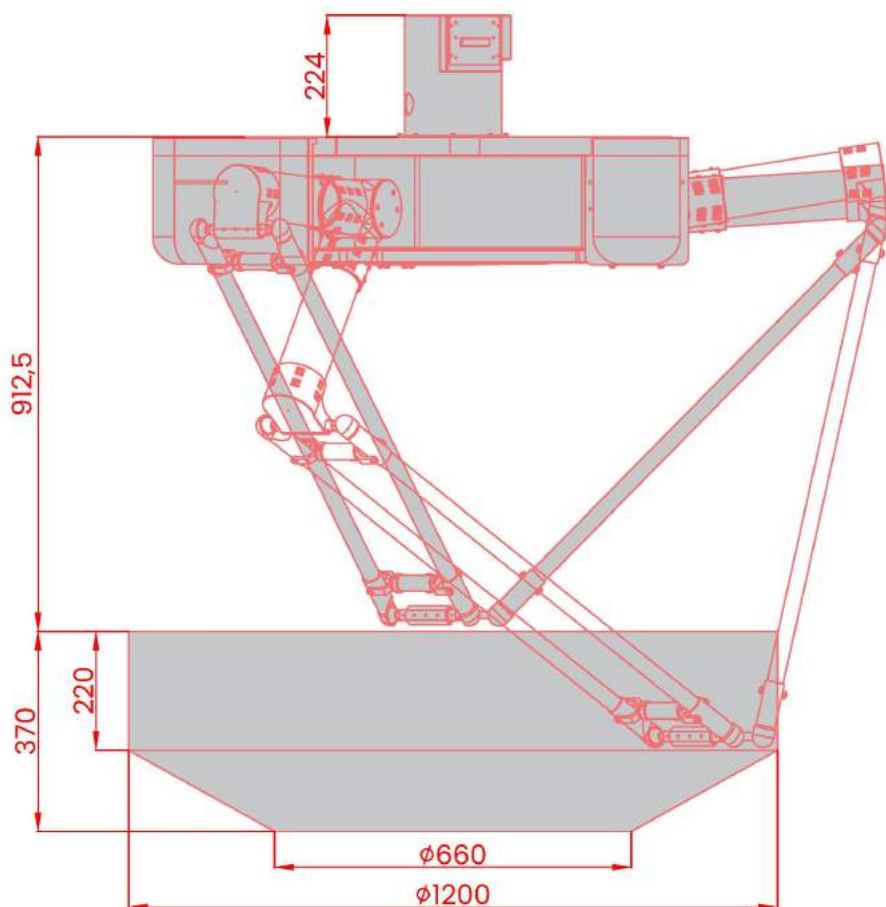


说明:

图示下部加深部分为机器人动平台几何中心的运动范围，上部为圆柱空间，并在下部向内收敛。

Instruction:

The bottom gray part is the work-place of the center point of moving platform, which is composed of a cylinder at the top and a circular truncated cone at the bottom.

法兰 Flange (mm)

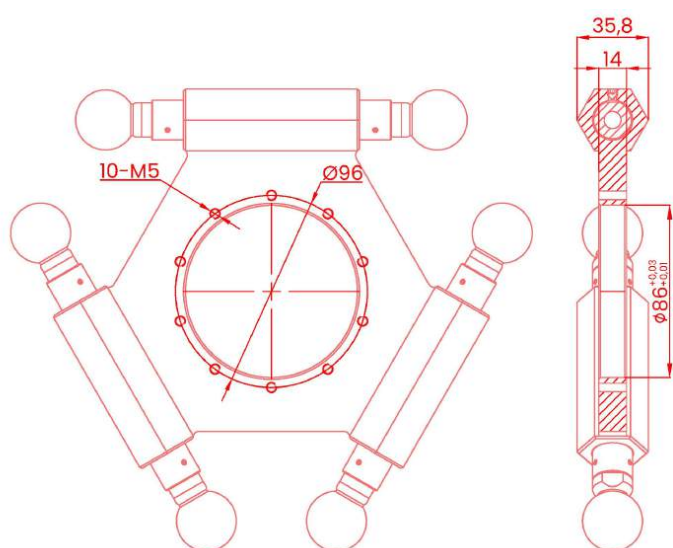

基座安装 Base installation (mm)

